

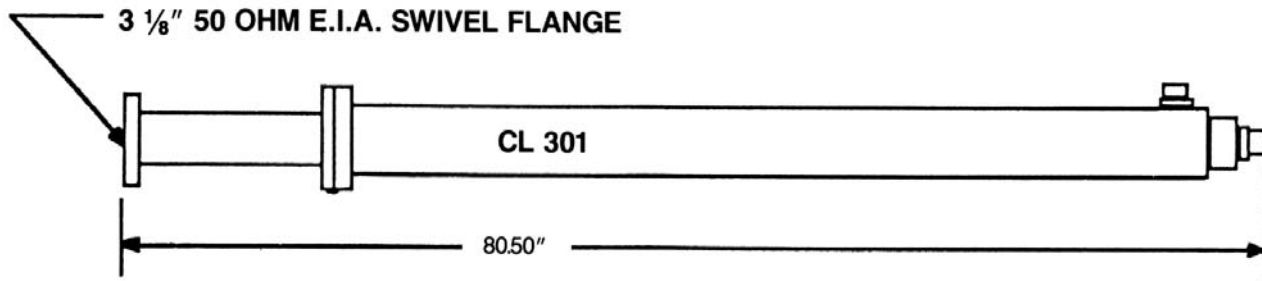


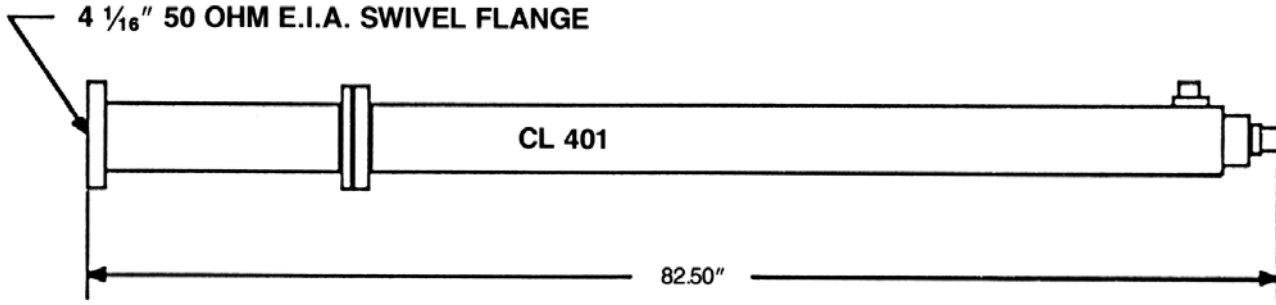

COAXIAL WATER LOADS FOR UHF C80W SERIES

DATA SHEET
No. T89A

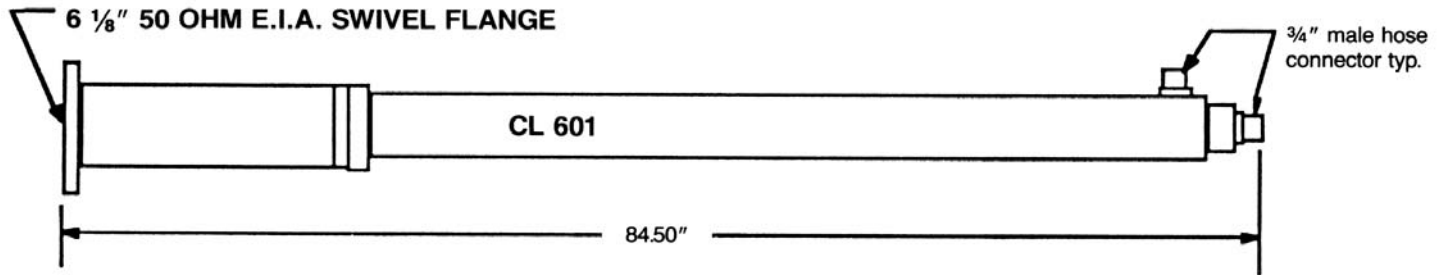

SPECIFICATIONS:

	CL 301	CL 401	CL 601
POWER HANDLING (CW)	50 KW	80 KW	100 KW
VSWR (MAX)	1.05:1 OVER ANY 6 MHz BAND 1.20:1 470-820 MHz		
INPUT CONNECTION (FEMALE)	3 1/8"	4 1/16"	6 1/8"
FLOW RATE (MIN.)	6 GPM	9 GPM	12 GPM
SIZE	SEE OUTLINE DRAWING		
COOLANT CONNECTIONS (MALE)	3/4" NPT OR 3/4" NGH		
COOLANT PRESSURE (MAX.)	80 PSIG		
COOLANT	20%-50% SOL. OF ETHYLENE GLYCOL & WATER		

*Contact factory for other bands, power levels and connectors.

